

GRULEV+




Specifications:

- ▶ Long MAXI: 18,00 m
- ▶ Charge maxi à 18m 0,60 t
- ▶ Capacité 1,60 t


GRUE UHT 18 M

· Flèche relevée à 15°.

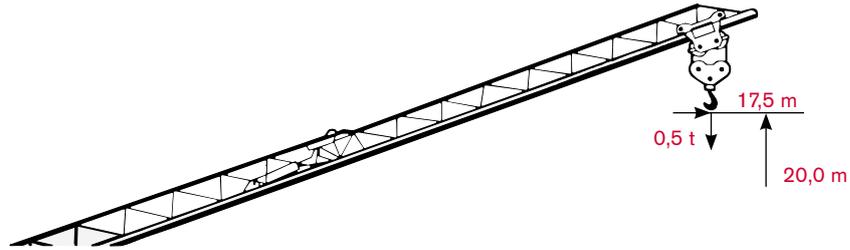


			1,9 m	4 m	6 m	8 m	10 m	12 m	14 m	16 m	17,5 m
0,5 t →	-	t	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50	0,50

· Flèche relevée à 10°.

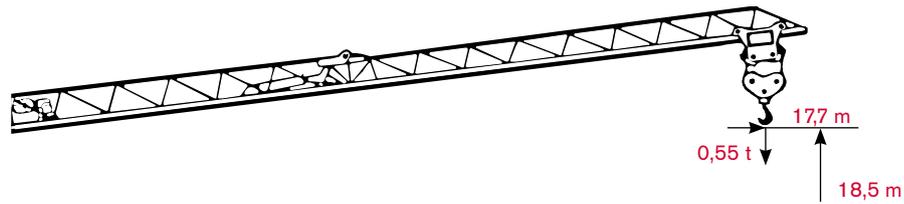


			1,9 m	4 m	6 m	8 m	10 m	12 m	14 m	16 m	17,7
0,5 t →	-	t	0,55	0,55	0,55	0,55	0,55	0,55	0,55	0,55	0,55

· Flèche étendu.

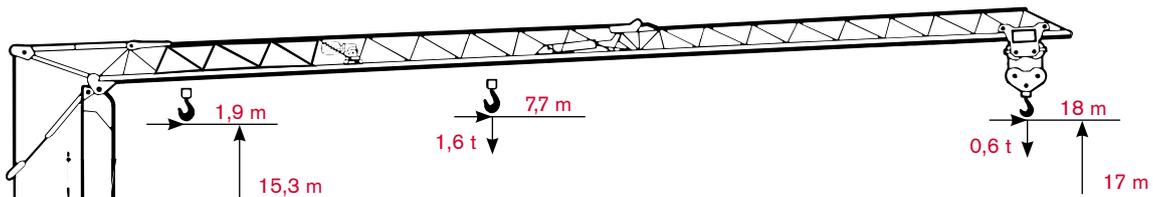


			1,9 m	4 m	6 m	8 m	10 m	12 m	14 m	16 m	18 m
1,60 t →	7,70 m	t	1,60	1,60	1,60	1,52	1,18	0,95	0,80	0,70	0,60

· Flèche repliée.

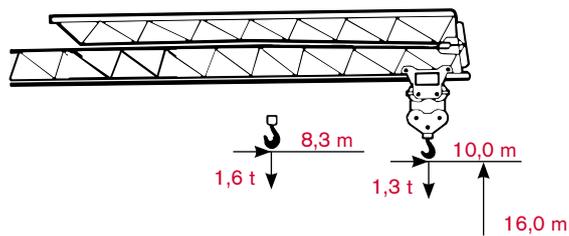


			1,9 m	4 m	6 m	8 m	10 m				
1,60 t →	8,30 m	t	1,60	1,60	1,60	1,60	1,30				



GRUE UHT 26 M

GRULEV+

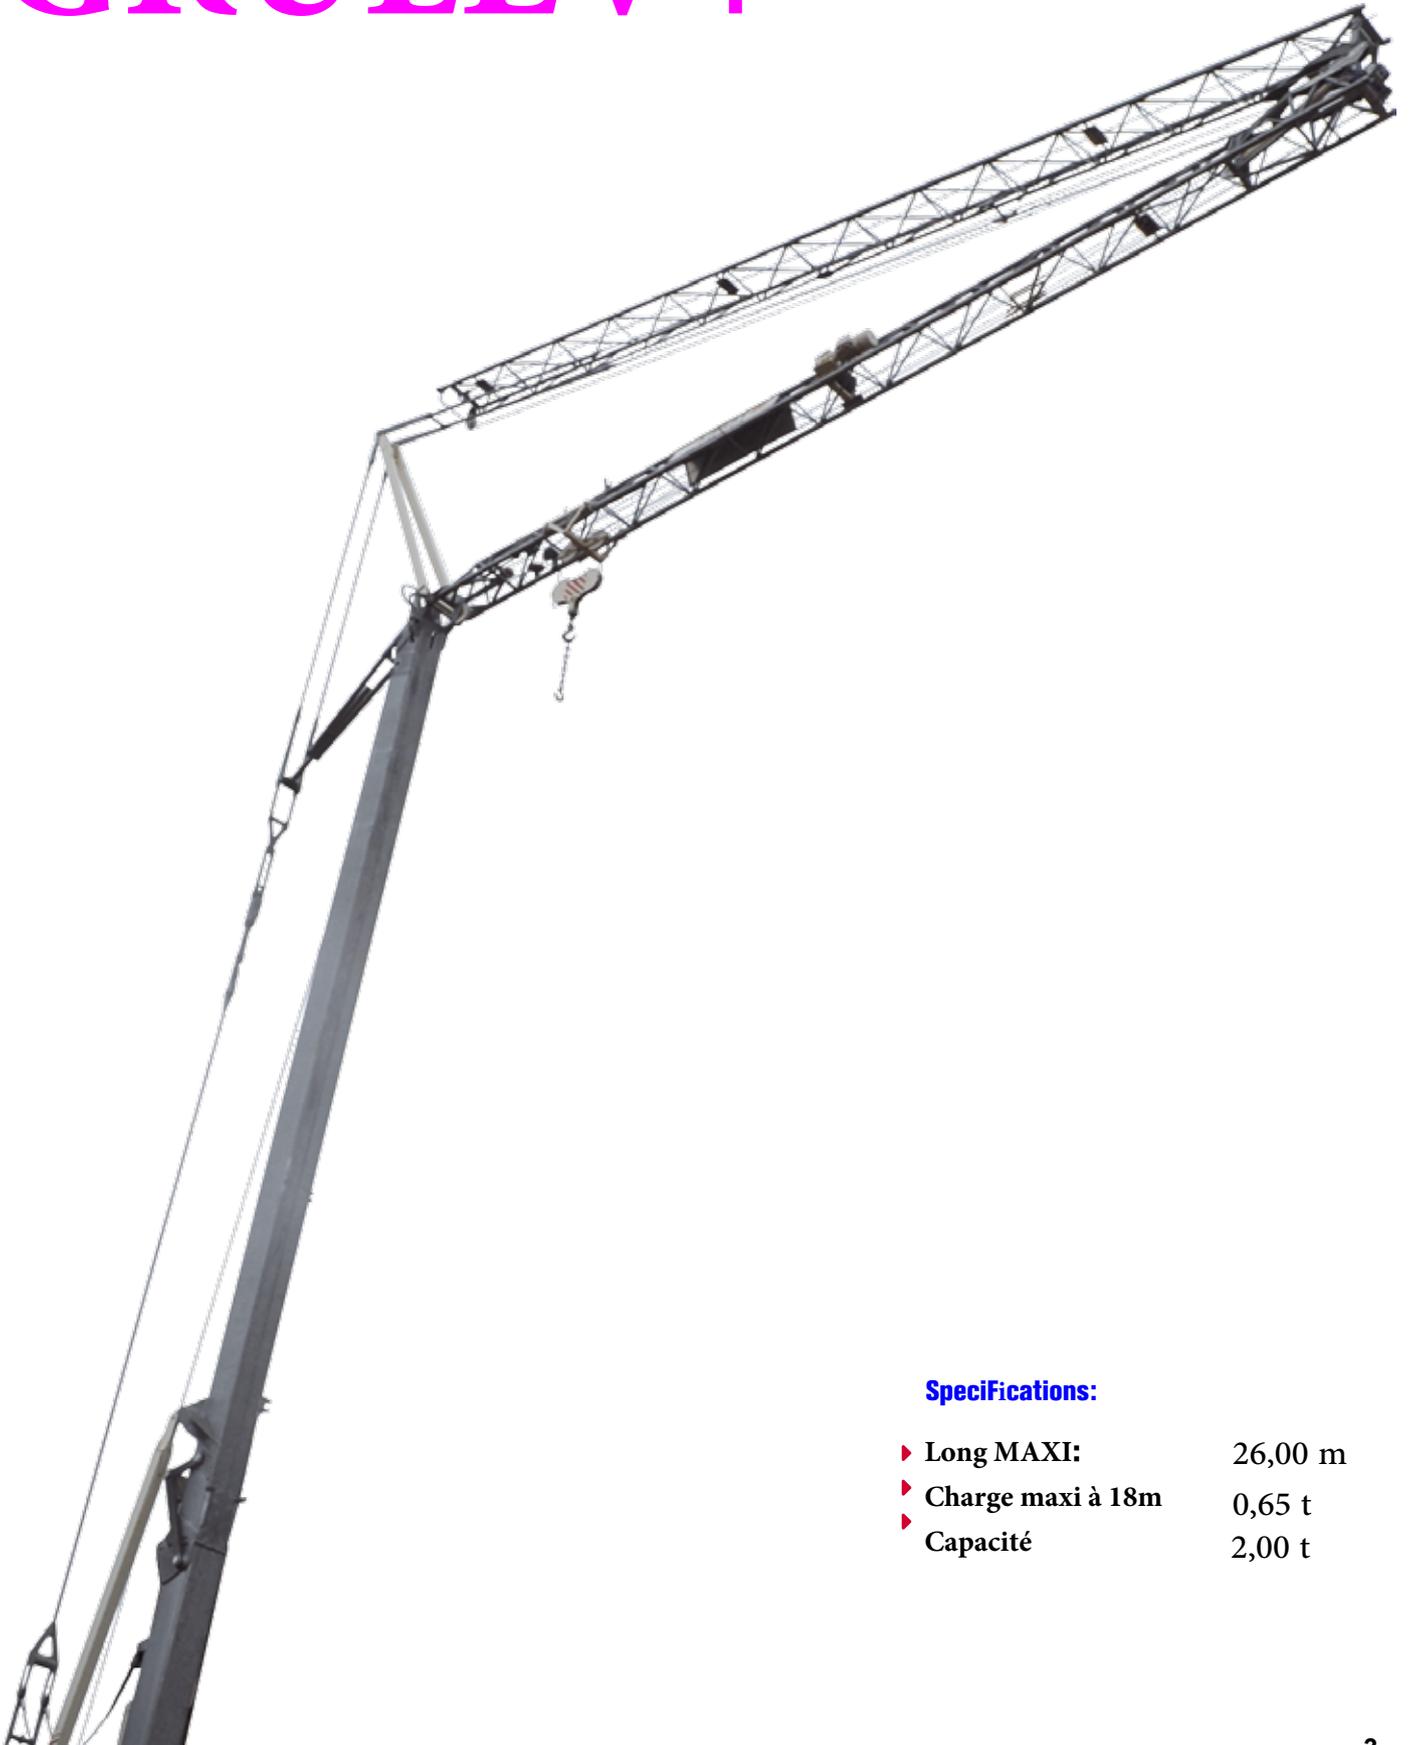


Specifications:

- ▶ Long MAXI: 26,00 m
- ▶ Charge maxi à 18m 0,65 t
- ▶ Capacité 2,00 t


GRUE UHT 26 M

· Flèche relevée à 15° ·

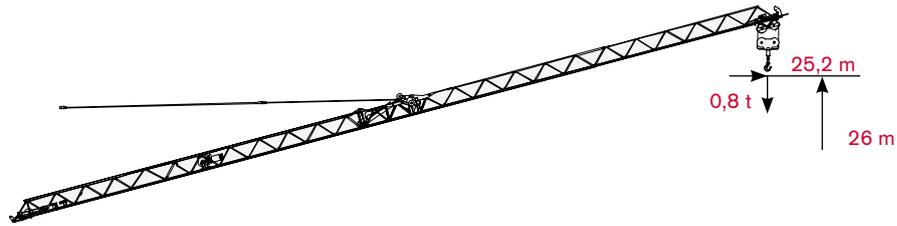


			3,9 m	6 m	8 m	10 m	12 m	14 m	16 m	18 m	20 m	22 m	24 m	25,2 m
	0,8 t	→	-	t	0,8	0,8	0,8	0,8	0,8	0,8	0,8	0,8	0,8	0,8

· Flèche étendu ·

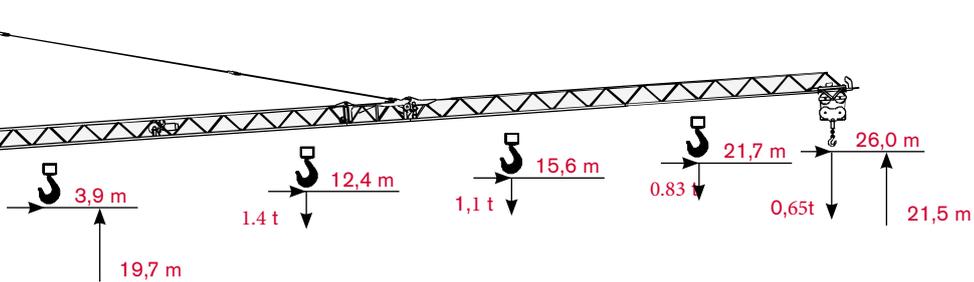


			3,9 m	6 m	8 m	10 m	12 m	14 m	16 m	18 m	20 m	22 m	24 m	26 m		
	2,0 t	→	12,43 m	t	2,0	2,0	2,0	1,72	1,46	1,26	1,11	0,99	0,89	0,80	0,71	0,65

· Flèche repliée et relevée ·

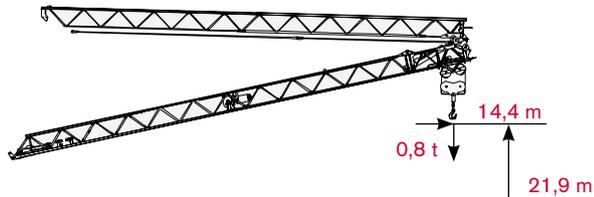

			3,9 m	6 m	8 m	10 m	12 m	14,4 m						
	0,8 t	→	-	t	0,8	0,8	0,8	0,8	0,8	0,8				

· Flèche repliée ·

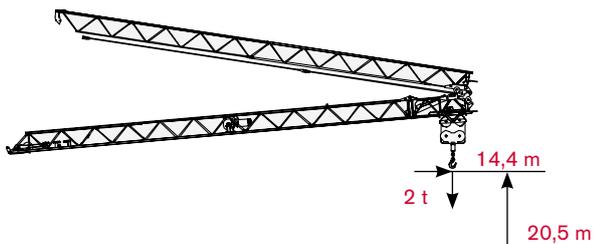

			3,9 m	6 m	8 m	10 m	12 m	14,4 m						
	2,0 t	→	-	t	2,0	2,0	2,0	2,0	2,0	2,0				

